
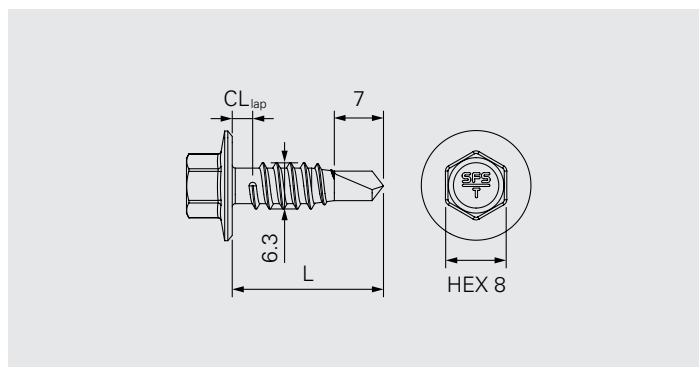


SL2-H15-6.3

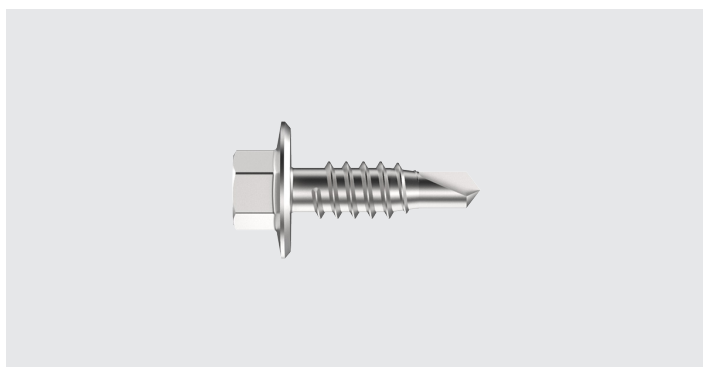

Application

Fastening of overlaps of metal decks, liner trays

Component 1 (t_I)		Component 2 (t_{II})		$\Sigma_{\max} t_I + t_{II}$
Steel	0.63–1.50	Steel	0.63–1.50	2.50

Fastener material

Carbon steel, Durocoat® 480

Approvals




Features and Benefits

- Self drilling fastener suitable for fastening of overlaps
- No torque control required given by free-spin zone
- Secured against unwinding given by cut-off thread-end and free-spin zone
- High tension and shear resistance achieved by optimized fastener geometry
- High corrosion durability thanks to special galvanic zinc coating

Documentation



Approval document (ETA) | Declaration of performance (DoP)

All measures in mm



Fastener in carbon steel onto steel

Product code	PU	L	CL _{lap}	
SL2-H15-6,3×20	500	32	1.20–2.50	943791



Accessories/Ancillaries

Product code	PU	Drive	Head drive	
E308-¼"-50	1	¼"	HEX8	1646160
Drive shaft H15 head	5	¼"	H15	1517546

All measures in mm

All information is non-binding and without guarantee. Before using the products, all specifications and calculations must be checked by a suitably qualified person and local regulations must be observed. This document is subject to revision. We reserve the right to make technical changes.